



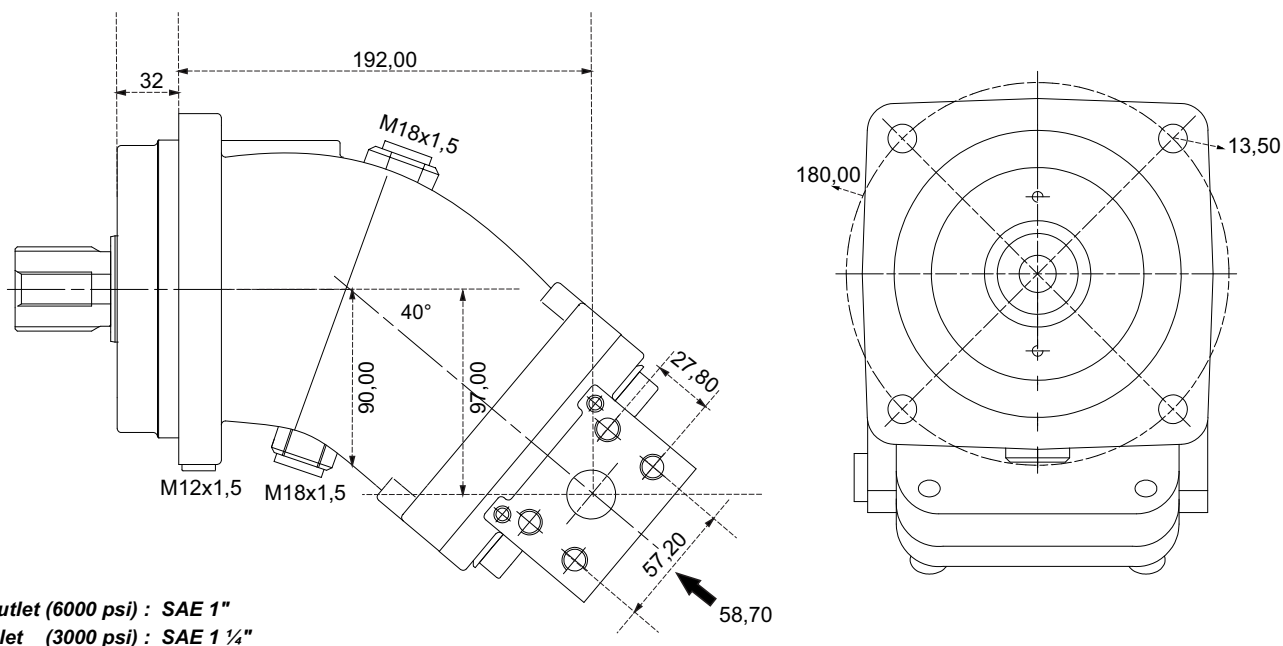


x 1000 rpm	108,40 cc
x 1500 rpm	162,60 cc
Max. Continuous Pump Speed	2000 rpm
Max. Continuous Pressure	400 bar
Max. Peak Pressure	450 bar
Max. Torque at 350 bar	600 Nm
Max. Flow	216,00 l/min.
Min. Pump Temperature	-25 °C
Max. Pump Temperature	110 °C
Weight without accessories	22,50 kg
Weight with accessories	23,00 kg
Rotation	CW-CCW

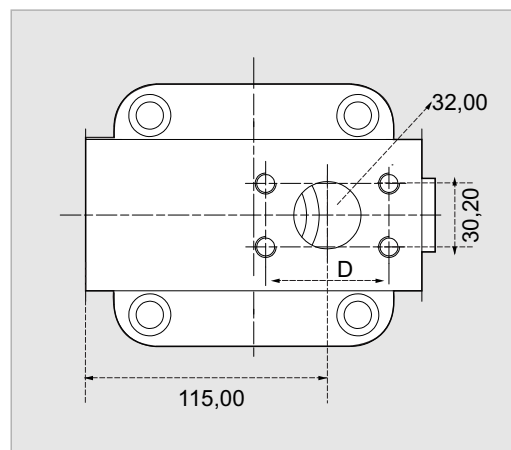


S1

Splined shaft DIN 5480
W45x2x21x9g




S2

Splined shaft DIN 5480
W40x2x18x9g



K1

Parallel keyed shaft
DIN 6885, As14x9x63



K2

Parallel keyed shaft
DIN 6885, As12x8x63

