



K 25 J Series Directional Valve 5 Way 2 Position



K25J




	K	25	J	D	-	15	AC220V
Model							
Position							
25 : 5 way - 2 position							
Control							
D : Solenoid control K : Pneumatic control							
Diameter							
8 : 1/4" 25 : 1"							
10 : 3/8" 32 : 1 1/4"							
15 : 1/2" 35 : 1 1/2"							
20 : 3/4"							
Standard Voltage							
AC 110V AC 220V DC 24V							

Specification							
Model	K25J-8	K25J-10	K25J-15	K25J-20	K25J-25	K25J-32	K25J-40
Flow Rate (m ³ /h)	5	7	10	20	30	40	50
Effective Sectional Area (mm ²)	20	35	60	120	190	300	400
Leakage rate (cm ³ /min)	≤ 50	≤ 100		≤ 200		≤ 300	
Direction Diverting Time (sec)	≤ 0.04	≤ 0.06		≤ 0.10		≤ 0.15	
Switch-Over Frequency (Hz)	≥ 10	≥ 8		≥ 4		≥ 3	
Working Pressure (Mpa)	0.2 ~ 0.8						
Voltage (V)	AC: 110, 220 ; DC: 24						
Ambient Temperature (°C)	-5 ~ 50						

Overall Dimension

K25J

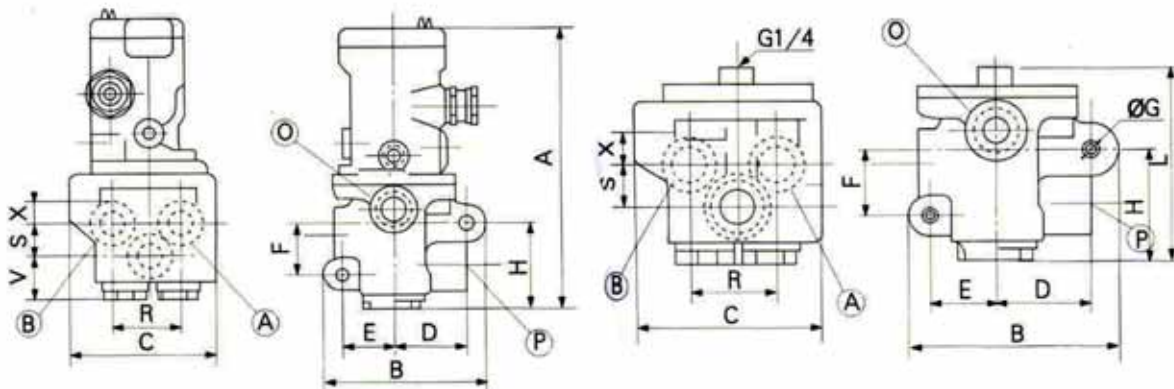

Type	Port Size		A	B	C	D	E	F	G	H	R	S	X	V	L	O
	G	M														
K25J-8W	G 1/4	M 12 x 1.25	180	99	94	45	32	31	∅ 10	55	44	19	16	28	90	G 1/2
K25J-10W	G 3/8	M 16 x 1.5														
K25J-15W	G 1/2	M 20 x 1.5														
K25J-20W	G 3/4	M 27 x 2	222	127	142	52	47	52	∅ 10	78	58	21	19	42	132	G 1
K25J-25W	G 1	M 33 x 2														
K25J-32W	G 1 1/4	M 42 x 2	285	155	220	69	55	117	∅ 10	140	80	36	35	52	187	G 2
K25J-40W	G 1 1/2	M 48 x 2														