


2FFI brass



Flat face couplings, ISO 16o28, brass.

Flat face couplings, with brass components and seals in FKM (Viton). Suitable for industrial applications. ISO 16o28 interchange.

Applications

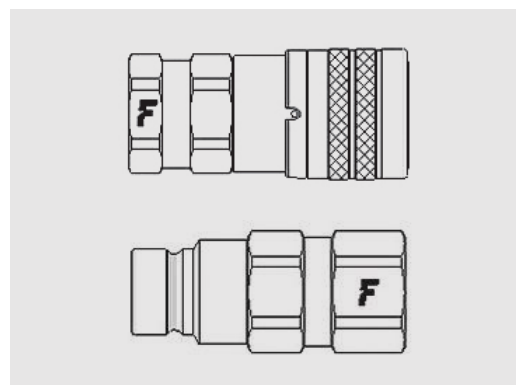

Technical Specifications

dash	Size		Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
	mm	inch					Male	Female	Male + Female
08	12,5	1/2"	12	100	0,01	220	50	50	50

Material	Brass
Seals	VITON
Working temperatures	- 20 °C to + 200 °C
Surface treatment	
Series Interchange	ISO 16o28
Valve Type	Flat
Connection	Push to Connect
Disconnection	Sleeve Retraction
Connection Under Pressure	Not Allowed

