


TWO Touch Fitting

Structure

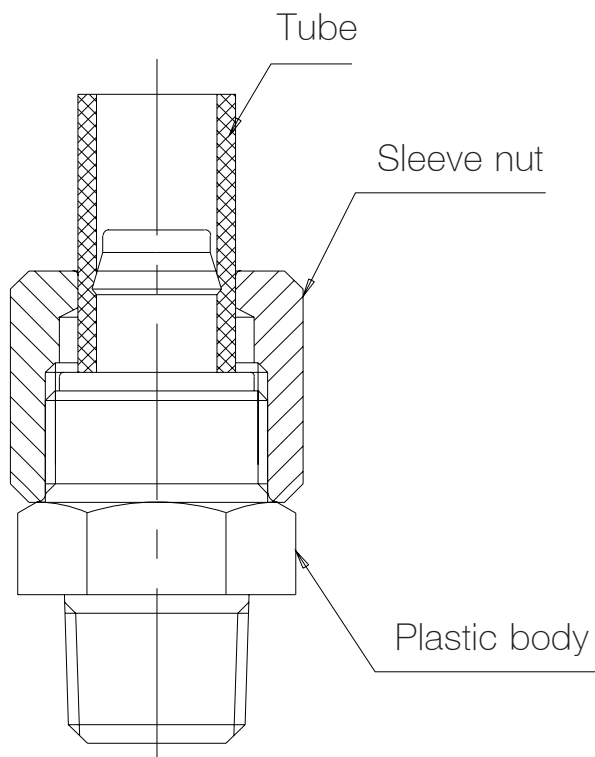


Specifications

Operating fluid	(Air)
Max. operating pressure	9.9 kgf/cm ² {990 kPa}
Operating Temp	0~60℃ (32~140°F)
Tube material	Polyurethane Tube

Dimensions

Union I

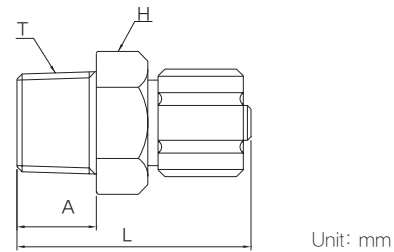


SQ2H Type

Model	Tube O/D	Tube I/D	T (Thread)	A	L	H
SQ2H04-01	4	2.5	PT1/8	8	24.6	12
SQ2H06-01	6	4	PT1/8	8	27.7	12
SQ2H06-02	6	4	PT1/4	11	31.7	16
SQ2H08-01	8	5.5	PT1/8	8	27.7	13
SQ2H08-02	8	5.5	PT1/4	11	31.7	16
SQ2H08-03	8	5.5	PT3/8	12	33	18
SQ2H10-02	10	6.5	PT1/4	11	32.2	17
SQ2H10-03	10	6.5	PT3/8	12	33.4	17
SQ2H12-02	12	9	PT1/4	11	34.9	17
SQ2H12-03	12	9	PT3/8	12	36.1	19

Dimensions

Union L

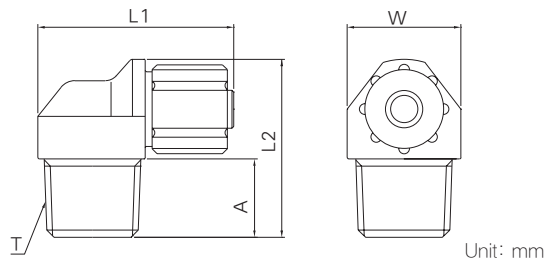


SQ2L Type

Model	Tube O/D	Tube I/D	T (Thread)	A	L1	L2	W
SQ2L04-01	4	2.5	PT1/8	8	23.6	20	12
SQ2L06-01	6	4	PT1/8	8	26.7	20	12
SQ2L06-02	6	4	PT1/4	11	30.1	23	16
SQ2L08-01	8	5.5	PT1/8	8	28.7	22	14
SQ2L08-02	8	5.5	PT1/4	11	30.1	25	16
SQ2L08-03	8	5.5	PT3/8	12	32.7	26	18
SQ2L10-02	10	6.5	PT1/4	11	30.6	27	17
SQ2L10-03	10	6.5	PT3/8	12	33.2	28	18
SQ2L12-02	12	9	PT1/4	11	35.9	30	19
SQ2L12-03	12	9	PT3/8	12	36.9	31	19

Dimensions

Union T

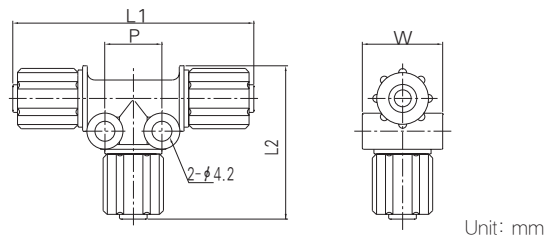

SQ2T Type

Model	Tube O/D	Tube I/D	P	L1	L2	W
SQ2T04-00	4	2.5	10	40.8	23.4	11
SQ2T06-00	6	4	12	48.8	30.3	14
SQ2T08-00	8	5.5	12	50.8	32.3	17
SQ2T10-00	10	6.5	13	51.5	36	20
SQ2T12-00	12	9	14.5	57.9	40.3	22