



## PRESSURE DROP (at 6 bar)



## PRESSURE DROP (at 8 bar)

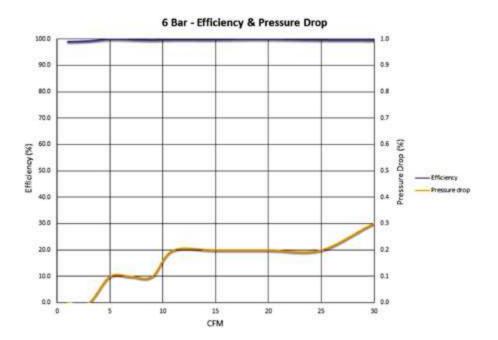

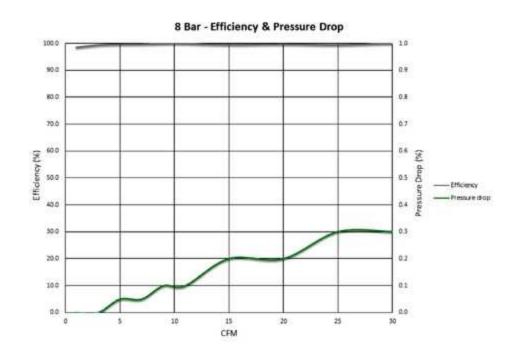

# Technical Information

#### EXPEL 30 - POINT OF USE LIQUID WATER, OIL & PARTICULATE COMPRESSED AIR FILTER

#### Exceptional compressed air quality guaranteed

Expel will dramatically improve compressed air systems throughout the industry. The unique patented design allows it to efficiently remove 99.999% of liquid, oil, water and removes other contaminants down to 1 micron when installed at point of use.



## Expel 30

#### **PRODUCT OVERVIEW**

- 30 cfm max rated flow rate
  \*See technical data on pages 2, 3 & 4
- 15 bar(g) 217 psi(g) maximum pressure
- 5 year manufacturer's warranty
- ½" & ¾" BSPT / NPT inlet / outlet connections
- Removes 99.9999% all liquid water, oils, and filters particulates down to 1 micron
- Grade 304 stainless steel body and head
- Pressure indicator as standard
- Optional pressure gauge.
- 1/2" BSPT / NPT male drain port

#### **FEATURES**

- Tested to ISO 12500 part 3 & 4 standard
- Worlds first cleanable, reusable compressed air filter
- No increase in pressure drop caused by contaminated filters
- No power source required
- Significantly reduced life cycle costs
- · Easy to install & maintain
- Instantaneous recovery from pulsed flows or stop start
- All spare parts available
- Fully dismantlable
- No decrease in performance over lifetime of well maintained filter

( : +62-21-56978889 (4 Lines) : +62-21-56977718 / 5672037

: sales@dycom.co.id

🚍 : www.dycom.co.id






## **TECHNICAL DATA**


OPERATIONAL SPECIFICATION	
Flow rate for a 7 bar(g) system	0.14 - 0.85m³/min
	8.5 - 51 m³/hr
	5 - 30 cfm
	141 - 850 litres/min
Operating pressure	1 - 15 bar(g)
Operating pressure	15 - 217 psi(g)
Operating temperature	>0 to +80 °C
Operating temperature	>32 to 176 °F
Maximum recommended	35 °C
inlet temperature	95 °F

### PRODUCT LINE DRAWING\*

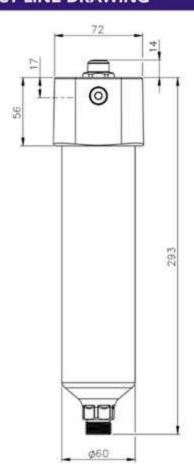

Product code - 1/2"	6000-002-AA
Product code - ¾"	6000-003-AA
Inlet/Outlet connection	1/2" or 3/4" BSPT/NPT
Drain connection	½" (m) BSPT/NPT
Weight	2.08 kg
Product dimensions	293 mm x 80 mm
Particulate removal	> 1 micron
Material (housing)	Stainless Steel 304
Material (internal)	ABS

#### LINE DRAWING FOR MOUNTING\*




BOX CONTENTS	QTY	
Expel 30 Unit	1	
Mounting bracket	÷ <b>1</b> ;	
Bolts M6 x 8 mm	4	
Fixing Screws	4	
Wall Plugs	4	
Manual	1	


Manual and Automatic drains available contact us or visit our website www.nexflow.com

\*Not to scale

# PRESSURE DROP (at 7 bar)

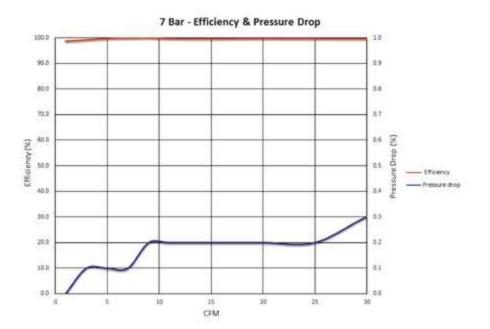

## LIQUID WATER REMOVAL

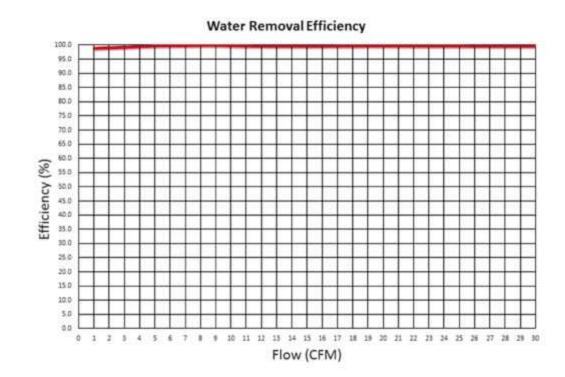

( : +62-21-56978889 (4 Lines) : +62-21-56977718 / 5672037